
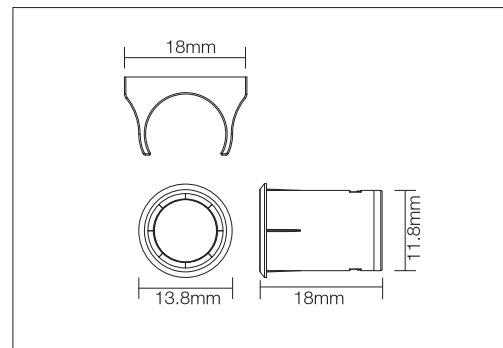


Сензор препятствие S2A-0 / Door trigger sensor S2A-0



МОДЕЛ MODEL	21-A002-11-P02
РАЗМЕР SIZE	Φ12x18
НАПРЕЖЕНИЕ VOLTAGE	DC 12V/24V
MAX МОЩНОСТ MAX WATTAGE	60W
ОБХВАТ RANGE	5 - 8cm
МОНТАЖ INSTALLATION	Външен/Вкопаване Surfaced/Recessed
МАТЕРИАЛ MATERIAL	Пластмаса Plastic
ЗАЩИТА IP PROTECTION	IP20

1. Сензор за врата, съвместим със смарт LED траф, който позволява управление на няколко светлинни ленти с един превключвател.
2. Активиране чрез препятствие (дърво, акрил, стъкло)
3. Обхват на засичане 5 - 8 см
4. При незатворена врата осветлението се изключва автоматично след 1 час.
5. Начините за монтаж на LED сензора са външен и вграден.

1. The Door Trigger Sensor Switch can work with smart LED driver and a switch can control multiple light bars.
2. Can be triggered by wood, glass and acrylic,
3. Sensing distance 5-8cm
4. If you forget to close the door, the light will automatically go out after one hour.
5. The installation methods of the led door sensor are plain mounted and embedded.

Свързване / Connection

